

Self-Regulating Heating Cable HTA



HTA is an industrial grade self-regulating heating cable that can be used for temperature maintenance or freeze protection of pipelines and vessels. It can be used in non-hazardous and ex-hazardous areas.

The power output adjusts automatically in response to the ambient temperature.

Because of its self-regulating characteristics it will not overheat even when the cable is overlapped. This guarantees maximum safety and reliability.

The installation of HTA heating cable is quick and simple and requires no special skills or tools. Because of its parallel construction the heating cable can be fitted on site to exact length without any complicated design calculations.

Features

- 15, 20 or 30 W/m
- Ex-approved solution
- Self-regulating, automatically adjusts power output in response to ambient temperature
- Thermoplastic or Fluoropolymer overjacket
- Easy to install
- Can be cut to required length on site without any complicated design calculations
- Will not overheat even when overlapped
- Can be used in explosive environments without temperature limiter
- Full range of accessories available
- UV and chemical resistant (Fluoropolymer)

Application Areas

- Temperature maintenance or freeze protection of pipelines and vessels in non-hazardous and ex-hazardous areas



Construction

1. 1.00 mm² nickel-plated copper conductors
2. Semi-conductive self-regulating matrix
3. Matrix insulation
4. Tinned copper braid
5. Overjacket Thermoplastic or Fluoropolymer

Self-Regulating Heating Cable HTA




Technical Data

Rated voltage	230 VAC
Maximum continuous operating temperature (trace heater energized)	65 °C
Maximum continuous exposure temperature (trace heater de-energized)	85 °C
Ambient temperature range	-60 ... +55 °C
Minimum installation temperature:	
Thermoplastic elastomer overjacket	-30 °C
Fluoropolymer overjacket	-60 °C
Minimum bending radius	25 mm
Maximum braiding resistance	10 Ohm/km
Conductor cross-section	1.00 mm ²
Dimension:	
Thermoplastic elastomer overjacket	10.90×6.00 mm
Fluoropolymer overjacket	10.50×5.60 mm
Weight:	
Thermoplastic elastomer overjacket	113 kg/km
Fluoropolymer overjacket	122 kg/km

Power Output Curve

Nominal power output at rated voltage 230 VAC.

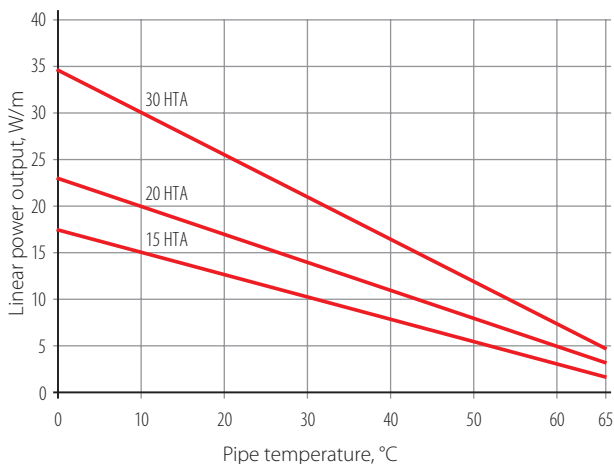

Max. Heating Circuit Length

For use with type C circuit breakers according to IEC 60898-1:2015

Type	Turn-on temperature, °C	Heating circuit length/m at 230 VAC	
		10A	16A
15HTA	10	104	136
	-20	58	78
20HTA	10	79	110
	-20	42	58
30HTA	10	45	70
	-20	20	40

Approvals



II 2 GD
 Ex 60079-30-1 IIC T6 Gb
 Ex 60079-30-1 IIIC T85°C Db
 Certificate No:
 Sira 17ATEX3335U
 Sira 18ATEX3038X




Certificate No:
 IECEx CCVE 17.0006U
 IECEx CCVE 17.0007X



Marking

Example: 15HTA2-BT

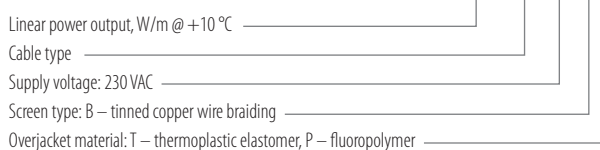

Types

Overjacket type	Order code	Overjacket color	Name	Power output, W/m
Thermoplastic elastomer overjacket, braiding	3201001006	Black	15HTA2-BT	15
	3201001007		20HTA2-BT	20
	3201001009		30HTA2-BT	30
Fluoropolymer overjacket, braiding	3201001012	Blue	15HTA2-BP	15
	3201001013		20HTA2-BP	20
	3201001015		30HTA2-BP	30